

esybox pop 60Hz

ELECTRONIC PRESSURE BOOSTING SYSTEM


US VERSION



PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and a density of 1000 kg/m³. Curve tolerance to ISO 9906.

SELECTION GUIDE GRAPH

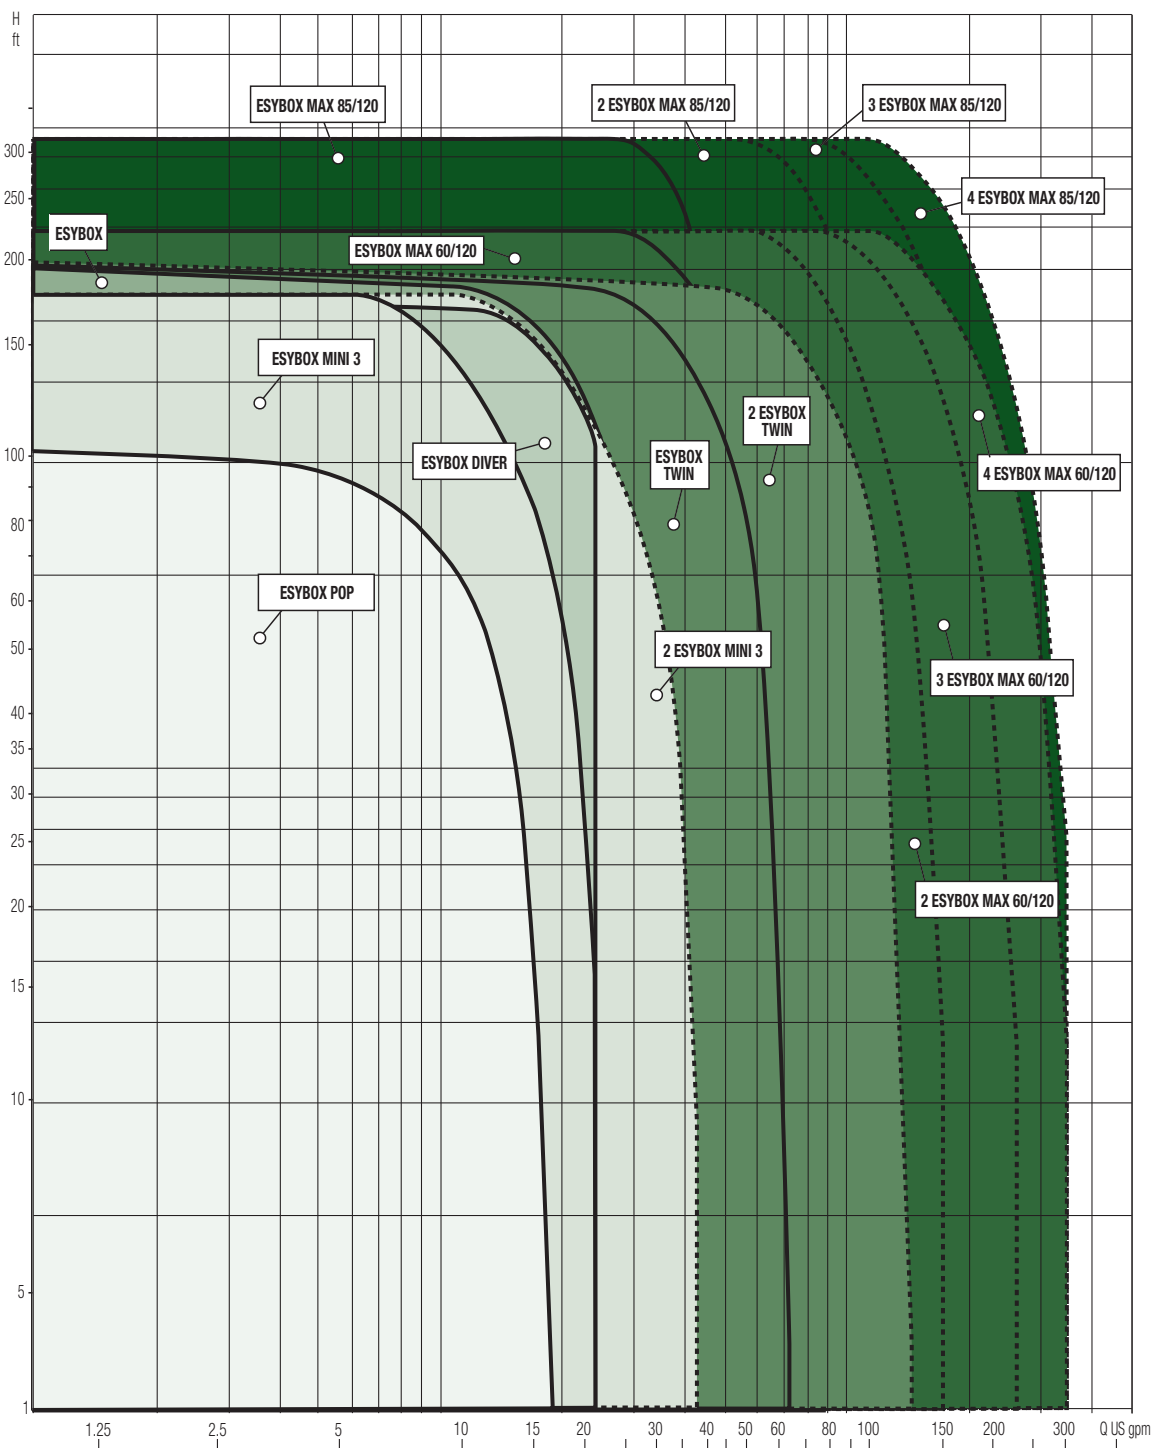



TECHNICAL DATA

Flow rate: up to 17.2 gpm

Head: 105 ft

Type of pumped liquid: clean, free of solids and abrasive substances, non-viscous, non-aggressive, non-crystallised, and chemically neutral

Liquid temperature range: 41°F to +122 °F

Maximum ambient temperature: +122 °F

Maximum working pressure: 87 psi

Motor protection rating: IPX5

Motor insulation class: F

Impeller material: technopolymer

Single-phase power supply: 1x110-127V ~

Power cord length and plug type: 4.92 ft

Installation options: can be installed vertically or wall-mounted using a dedicated accessory

Certifications: WRAS, ACS, NSF, CSA

FOR FLOODED SUCTION ONLY – NOT SELFPRIMING

This electronic pressure boosting system is designed for small residential environments.

It features sound-absorbing materials and a water-cooled permanent magnet motor, ensuring quiet operation, which makes it particularly suitable for home use.

The professional performance of this device is ensured by its advanced components, which include: an anti-cycling feature, which detects leaks by monitoring the frequency of starts and stops; an automatic shut-off mechanism that activates in the event of dry running; an anti-freeze system - to prevent ice formation in the hydraulic components, the pump activates when temperatures drop below 41°F; a motor-protection technology to prevent issues from prolonged inactivity.

The adjustable connections facilitate quicker, easier, and more flexible installation.

Integrated connectivity enables users to configure settings via a smartphone and access cloud services without the need for additional accessories. Additionally, the remote control uses H₂D technology to view and manage comfort features and parameters.

PUMP DESIGN FEATURES

Sound-absorbing ABS protective casings. Technopolymer impellers. Non-return valve with integrated temperature, flow, and pressure sensors.

MOTOR DESIGN FEATURES

Permanent magnet motor cooled by the pumped liquid, encased in a stainless steel jacket for enhanced durability.


ELECTRONICS FEATURES

The inverter-controlled permanent magnet motor ensures significant energy savings. Its inverter feature not only enhances energy efficiency but also provides protection against water hammer. Integrated protections: dry running, excessive current, abnormal voltage, overheating, freezing, stalling, and anti-cycling. The device includes a guided procedure for online connection, enabling easy configuration and remote or local adjustment of all parameters through an app. Users can simplify the setpoint adjustment directly from the pump and view the current status, alarm history, and consumption data via the APP.

ESYBOX POP - ELECTRONIC PRESSURE BOOSTING SYSTEM

Pumped liquid temperature range: from 41 °F to +122 °F

Maximum operating pressure: +122 °F

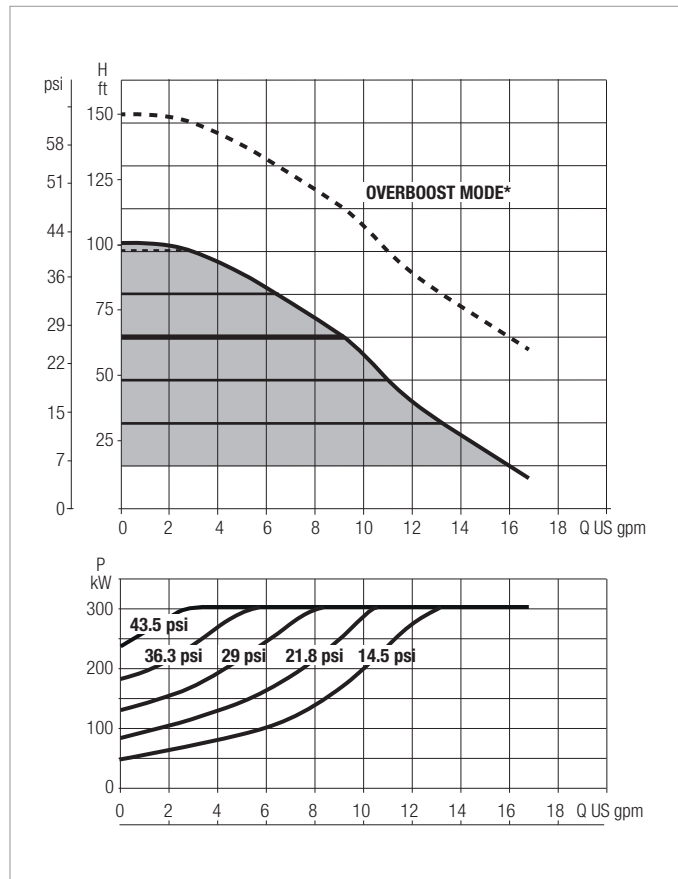


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

* The pressure entering from the water main is used to increase the maximum achievable outlet pressure. The example reports an inlet pressure of 21.5 psi. Before proceeding with the installation, it is essential to verify the regulations set by the local water supply authority.

MODEL	Q=USgpm	0	2.6	5.3	7.9	10.6	13.2	16.6
ESYBOX POP	H (ft)	105	102	88	71	52	33	9
	psi	45.5	44.2	38.2	30.8	22.5	14.3	4

MODEL	ELECTRICAL DATA				
	N° IMPELLERS	POWER INPUT 60 Hz	P1 MAX		In A
			kW	HP	
ESYBOX POP	2	1x110-127V ~	0.3	0.4	5

MODEL	Units	A	B	C	C1	C2	C3	C4	H	H1	H2	I Ø	DNA NPT	DNM NPT	PACKING DIMENSIONS			WEIGHT	Q.TY x PALLET
															L/A	L/B	H		
ESYBOX POP	inches	8.9	4.7	0.6	1	0.9	1.4	1.4	8.2	3.2	3.3	3/4"	3/4"	3/4"	9.8	7.9	9.8	9.7 lbs	76

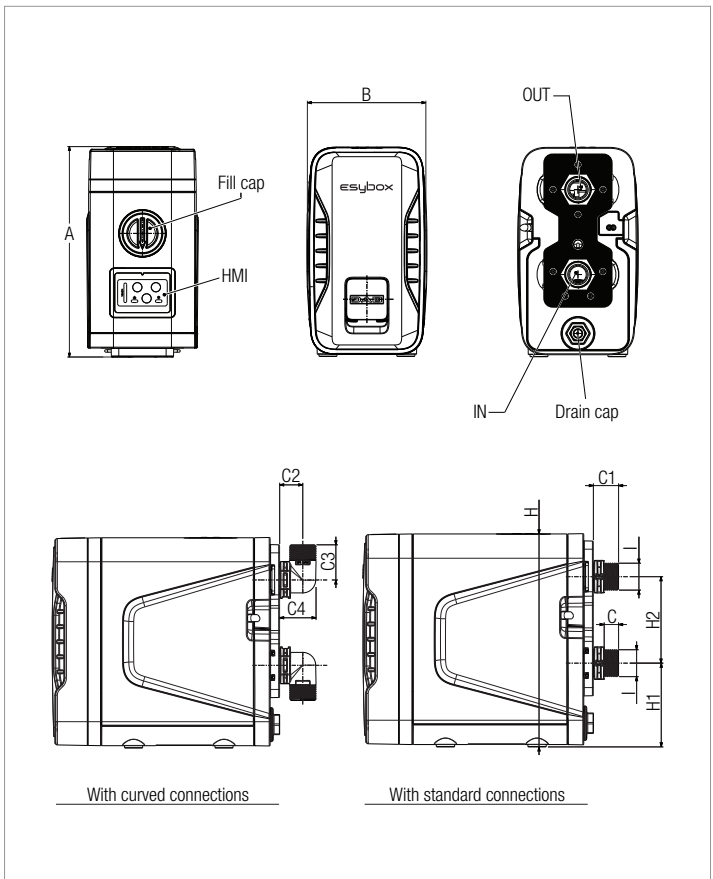

Two pairs of fittings will be supplied, both elbow and standard.


H₂D DIGITAL SERVICE

THE SMART PLATFORM FOR MANAGING DAB DEVICES REMOTELY

H₂D IS THE DAB PLATFORM — COMING IN A MOBILE AND DESKTOP VERSION — THAT PAIRS WITH LATEST GENERATION DAB DEVICES TO SHOW YOU WHAT'S GOING ON INSIDE SYSTEMS.

It allows you to configure your pump and optimize its operation remotely, saving time, resources and money.

Ideal for anyone seeking to future-proof their business with solutions designed to improve processes, offer more service, and be environmentally responsible.

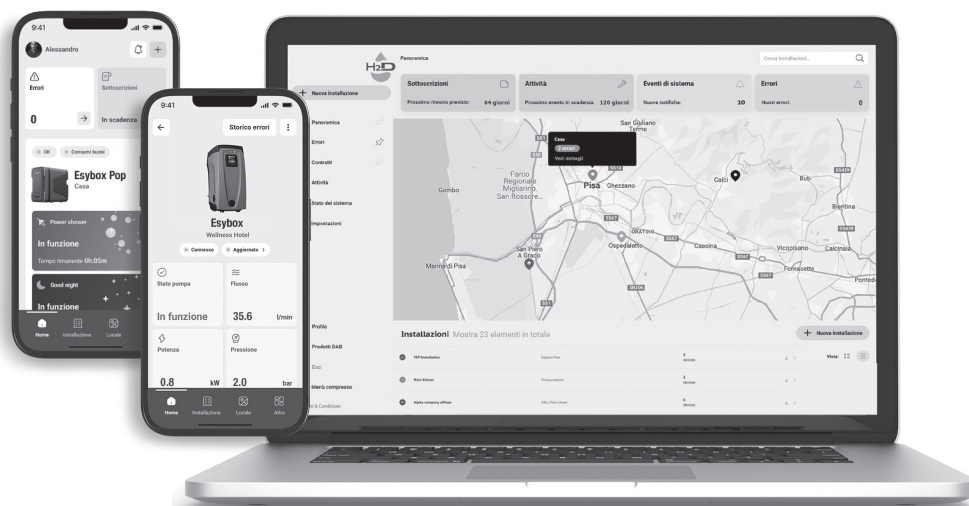

H₂D FOR PROFESSIONALS

H₂D simplifies and streamlines work routines, allowing for precise configuration of all parameters.

SEE THE FUTURE OF YOUR BUSINESS THROUGH A NEW LENS

Desktop and mobile solutions work together seamlessly. With user-friendly access on your smartphone, it's never been easier to communicate with pumps on site or keep an eye on your systems from anywhere. From your desktop, you can dive deeper into data analysis. You can easily enhance workflow, improve customer service, and grow your business.



OPTIMIZE TIME ON THE JOB

H₂D allows systems to be controlled remotely and, where needed, work on site is easier to plan.



PROBLEM FIXED FIRST TIME, EVERY TIME

H₂D provides all the info you need to prepare for the job on site where required.



LITTLE OR NO DISRUPTION

Remote monitoring allows you to address potential issues and prevent disruptions.



MORE SERVICE AND LESS URGENT CALLOUTS = INCREASED PROFIT

With remote monitoring, we offer a 24/7 service that includes preventive maintenance services, helping to avoid emergencies.




SATISFIED CUSTOMERS

With parameters optimized remotely, the system ensures consistently smooth operation.



FROM DCONNECT TO H₂D

H₂D replaces and improves on DConnect. Latest generation DAB products connect effortlessly to H₂D.

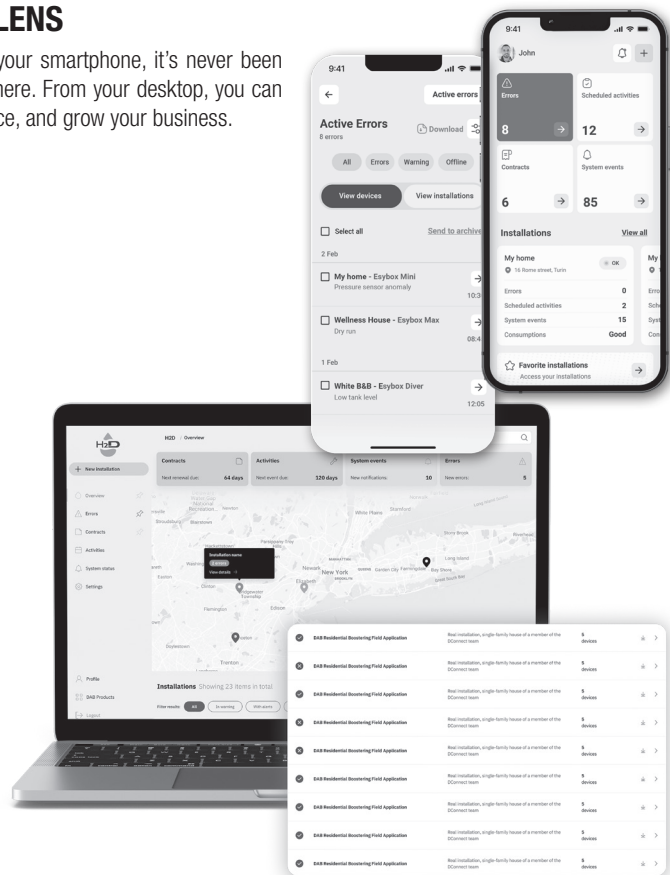

H₂D DIGITAL SERVICE

THE SMART PLATFORM FOR MANAGING DAB DEVICES REMOTELY



H₂D FOR HOMEOWNERS AND END USERS

H₂D is a tool designed to help you manage water use effectively, optimizing consumption, costs, and comfort.



OVERVIEW

H₂D makes it super easy to get a real-time overview of your usage and device operating status. If any issues arise, you can contact support immediately, regardless of your location.






SMART HOME. TALK WITH ESYBOX!

You can activate comfort modes by speaking to voice assistants like Alexa and Google Home. For example, you can say, “Alexa, activate Power Shower.”

COMFORT FUNCTIONS

You can access these functions through an app, allowing you to customize the system's performance and features to balance comfort and energy consumption.

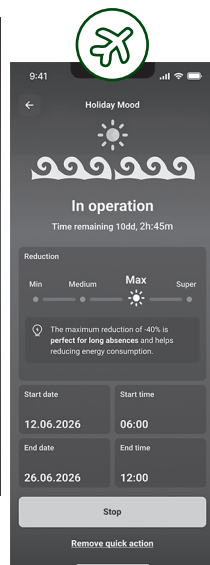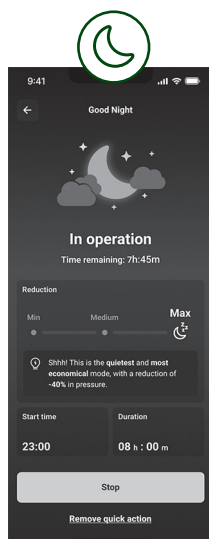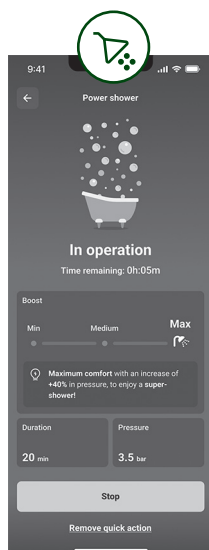

POWER SHOWER

Turn a regular shower into a “power shower”: this feature increases water pressure just for the time it takes to shower, while reducing usage for the rest of the day.



GOOD NIGHT

During the night — or when taking a quick nap — you can turn on sleep mode: this switches the already quiet pump to whisper-quiet operation. And it also helps reduce consumption.



HOLIDAY MOOD (For Esybox Pop only)

This important feature helps minimize device activity, thereby saving energy during vacations or extended periods when you are away.

INSTALL H₂D NOW!






LEARN MORE
H2D.COM/EN




HOW TO USE H₂D



	DESCRIPTION
 10.5 x 4.7 x 5.5 in ACS ATTESTATION DE CONFORMITE CHIMIQUE WRAS APPROVED PRODUCT NSF	ESYDOCK POP Thanks to its adjustable connections, the dock fits any plumbing configuration, allowing for faster, easier, and more flexible installation. It comes with all the interfaces required for connection to the system. It also includes a wall mounting kit and a bypass connection.

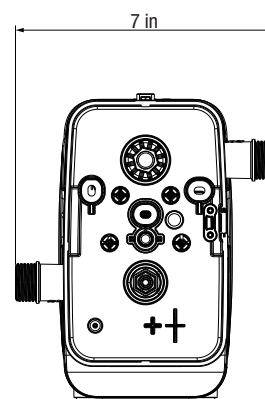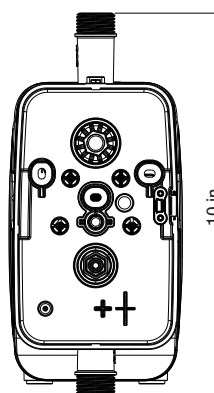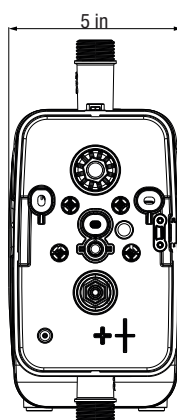

OPTION FOR INSTALLATION WITH ESYDOCK POP

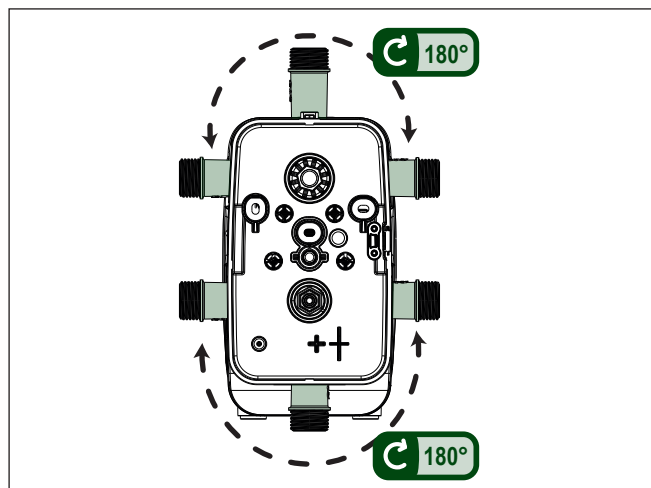

	DESCRIPTION
	ESyWALL POP Wall-mounting kit including bracket, screws, and plugs.

DNA

P U M P S S E L E C T O R

On-line selection tool



DAB PUMPS LTD.

Unit 6 Gilberd Court
Newcomen Way, Severalls Park
CO4 9WN
Colchester
ordersuk@dwtgroup.com
Tel. +44 0333 777 5010



DAB PUMPS IBERICA S.L.

Calle Verano 18-20-22
28850 - Torrejón de Ardoz - Madrid
Spain
Info.spain@dwtgroup.com
Tel. +34 91 6569545



DAB PUMPS SOUTH AFRICA (PTY) LTD

Twenty One industrial Estate,
16 Purlin Street, Unit B, Warehouse 4
Olifantsfontein -1667 - South Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997



DAB PUMPS BV

'tHofveld 6 C1
1702 Groot Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353



DAB PUMPS HUNGARY KFT.

H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DAB PUMPS (QINGDAO) CO. LTD.

No.10 Xindong Road
Jiulong Town,
Jiaozhou City
266319 Qingdao (Shandong) - China
sales.cn@dwtgroup.com
Tel. +86 400 186 8280



DAB PUMPS B.V.

Statenlaan, 4
5223 LA, 's-Hertogenbosch
Nederland
info.nl@dabpumps.com
Tel. +31 416 387280



DAB PUMPS POLAND Sp. z o.o.

Ul. Cieślowskich 35K
03-017 Warszawa - Poland
sprzedaz@dabpumps.com.pl



DAB PUMPS OCEANIA PTY LTD

426 South Gippsland Highway,
Dandenong South VIC 3175 - Australia
info.oceania@dwtgroup.com
Tel. +61 1300 378 677



DAB PUMPS FRANCE SAS

Tour Ariane, Paris la Défense 9
5, Place de la Pyramide
92800 Puteaux - France
info.fr@dabpumps.com
Tel. +33 (0)6 79 63 05 46
+33 (0)7 89 01 53 35



DAB PUMPS CANADA INC.

333 Bay Street, Suite 4600, Toronto,
Ontario, M5H 2S5, - Canada
orders@dwtgroup.ca
Tel. 1-833-322-7867



PT DAB PUMPS INDONESIA

Satrio Tower lantai 26
unit C-D, Jl. Prof. Dr. Satrio Kav. C4,
Kel. Kuningan Timur, Kec. Setiabudi, Kota Adm.
Jakarta Selatan, Prov. DKI Jakarta. - Indonesia
Tel. +62 2129222850



DAB PUMPS GMBH

Am Nordpark 3
D - 41069 Mönchengladbach - Germany
info.germany@dwtgroup.com
Tel. +49 2161 47388-0
Fax +49 2161 47388-36



DAB PUMPS DE MÉXICO, S.A. DE C.V.

Av Amsterdam 101 Local 4
Col. Hipódromo Condesa,
Del. Cuauhtémoc CP 06170
Ciudad de México
Tel. +52 55 553 2621