


| U.S. Gallons | W | H | Weight (lbs.) |
|--------------|------|------|---------------|
| 150 | 3' | 2'9" | 100 |
| 200 | 3'6" | 2'9" | 115 |
| 300 | 3' | 5'8" | 150 |
| 400 | 3'6" | 5'8" | 170 |
| 500 | 4' | 5'8" | 210 |
| 830 | 5' | 5'8" | 285 |
| 1000 | 5' | 7' | 325 |
| 1200 | 6' | 5'8" | 365 |
| 1480 | 6' | 7' | 410 |
| 1620 | 7' | 6' | 475 |
| 2015 | 7' | 7' | 510 |
| 2500 | 7' | 8' | 565 |

Notes:

- Tanks are constructed from 20 gage G-90 grade galvanized steel.
- Tops are constructed from 22 gage G-90 grade galvanized steel.
- Internal tank surfaces are treated with a FDA approved for potable water and meets ANSI/NSF 61 specifications.

- 1 Optional PVC mpt/slip male adapter 1" thru 4" for inlet or overflow.
- 2 Optional 12" or 16" stainless steel screened filter basket.
- 3 Standard polypropylene bulkhead fitting fpt thread 3/4", 1 1/4", or 2".
- 4 Add 6"-14" for top height.

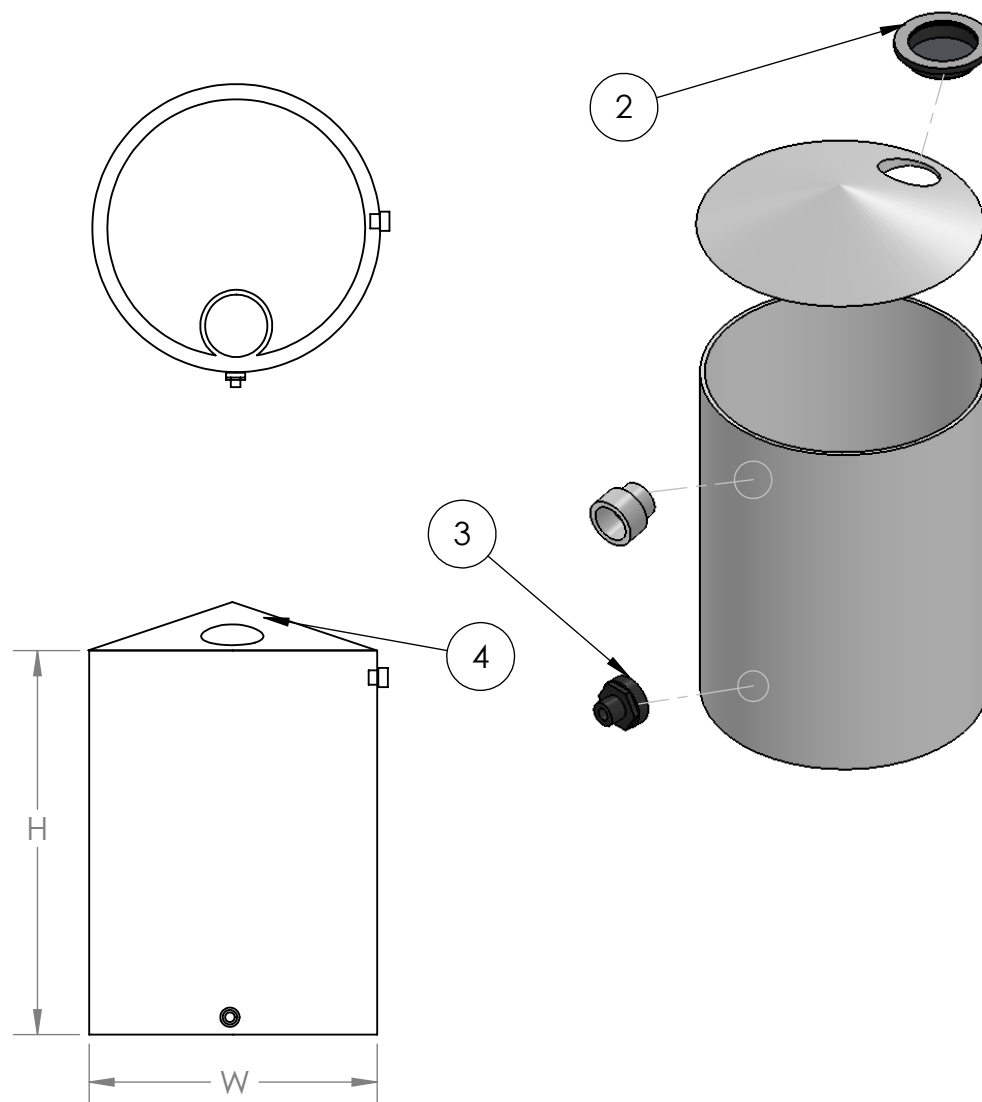

Title:

Galvanized Metal Tank
Specifications

SIZE

A

Drawn: Jose Benitez

Checked:

Approved:

SCALE: 1:1

Rev C

SHEET 1 OF 1